

SERIE EZD CON RELE' STATICO
EZD SERIES WITH SOLID STATE RELAY

INTERFACCIA MODULARE A RELE' STATICO 2A-24VDC, 100mA-60VDC E 2A-240VAC, LARGHEZZA 6,2mm
2A-24VDC, 100mA-60VDC AND 2A-240VAC SOLID STATE RELAY INTERFACE MODULE, BREADTH 6,2mm




- * Led segnalazione alimentazione del relè
- * Relay input signaling led
- * Aggancio per barra din
- * Drawbar for din bar
- * Uscita 2A-24VDC, 100mA-48VDC e 2A-240VAC
- * 2A-24VDC, 100mA-48VDC and 2A-240VAC output
- * Pettine a 20 poli per collegamento interfacce in parallelo
- * 20 Pole comb for in parallel interface connection
- * Larghezza interfaccia 6,2mm
- * Interface breadth 6,2mm
- * Grado di protezione IP20
- * Protection degree IP20
- * Temperatura funzionamento -20 +55 °C
- * Operating temperature -20 +55 °C


TABELLA SELEZIONE INTERFACCIE - INTERFACE SELECTION TABLE

Tensione ingresso interfacce Interface Input voltage	Corrente uscita Output current	Range tensione uscita Output voltage range	Modello Model	SSR impiegati nelle interfacce SSR used on interfaces
6VDC (5-12VDC)	2A DC	0-33VDC	EZD-24D-5RS224	SSR05D-224
24VDC (17-30VDC)	2A DC	0-33VDC	EZD-24D-RS224	SSR01D-224
60VDC (37-72VDC)	2A DC	0-33VDC	EZD-60D-RS224	SSR02D-224
6VDC (5-12VDC)	100mA DC	0-60VDC	EZD-24D-5RS0148	SSR05D-0148
24VDC (17-30VDC)	100mA DC	0-60VDC	EZD-24D-RS0148	SSR01D-0148
60VDC (37-72VDC)	100mA DC	0-60VDC	EZD-60D-RS0148	SSR02D-0148
6VDC (5-12VDC)	2A AC	12-275VAC	EZD-24D-5RS2240	SSR05A-2240
24VDC (17-30VDC)	2A AC	12-275VAC	EZD-24D-RS2240	SSR01A-2240
60VDC (37-72VDC)	2A AC	12-275VAC	EZD-60D-RS2240	SSR02A-2240


Dimensioni in mm
Dimensions in mm



Modelli in DC
DC models



Modelli in AC
AC models



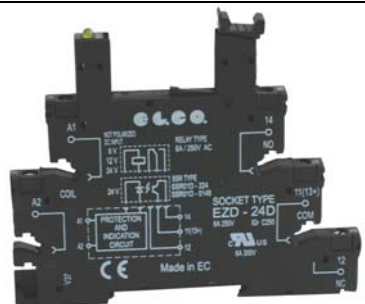


TABELLA SELEZIONE ZOCCOLI - SOCKET SELECTION TABLE

Tensione controllo interfacce Interface control voltage	Modello Model
6VDC (5-12VDC)	EZD-24D
24VDC (17-30VDC)	EZD-24D
60VDC (37-72VDC)	EZD-60D

ACCESSORI
ACCESSORIES

Pettine a 20 poli 20 Pole comb	Modello / Model
	EZD-20P

